


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CAT. NO.	DESCRIPTION / REMARKS
K55HXTDR-8455	A101059	STANDARD	3/4	460	2.0	60	1075	CW. LEAD END REV	3742	K55 BALL BRG. ENCLOSED

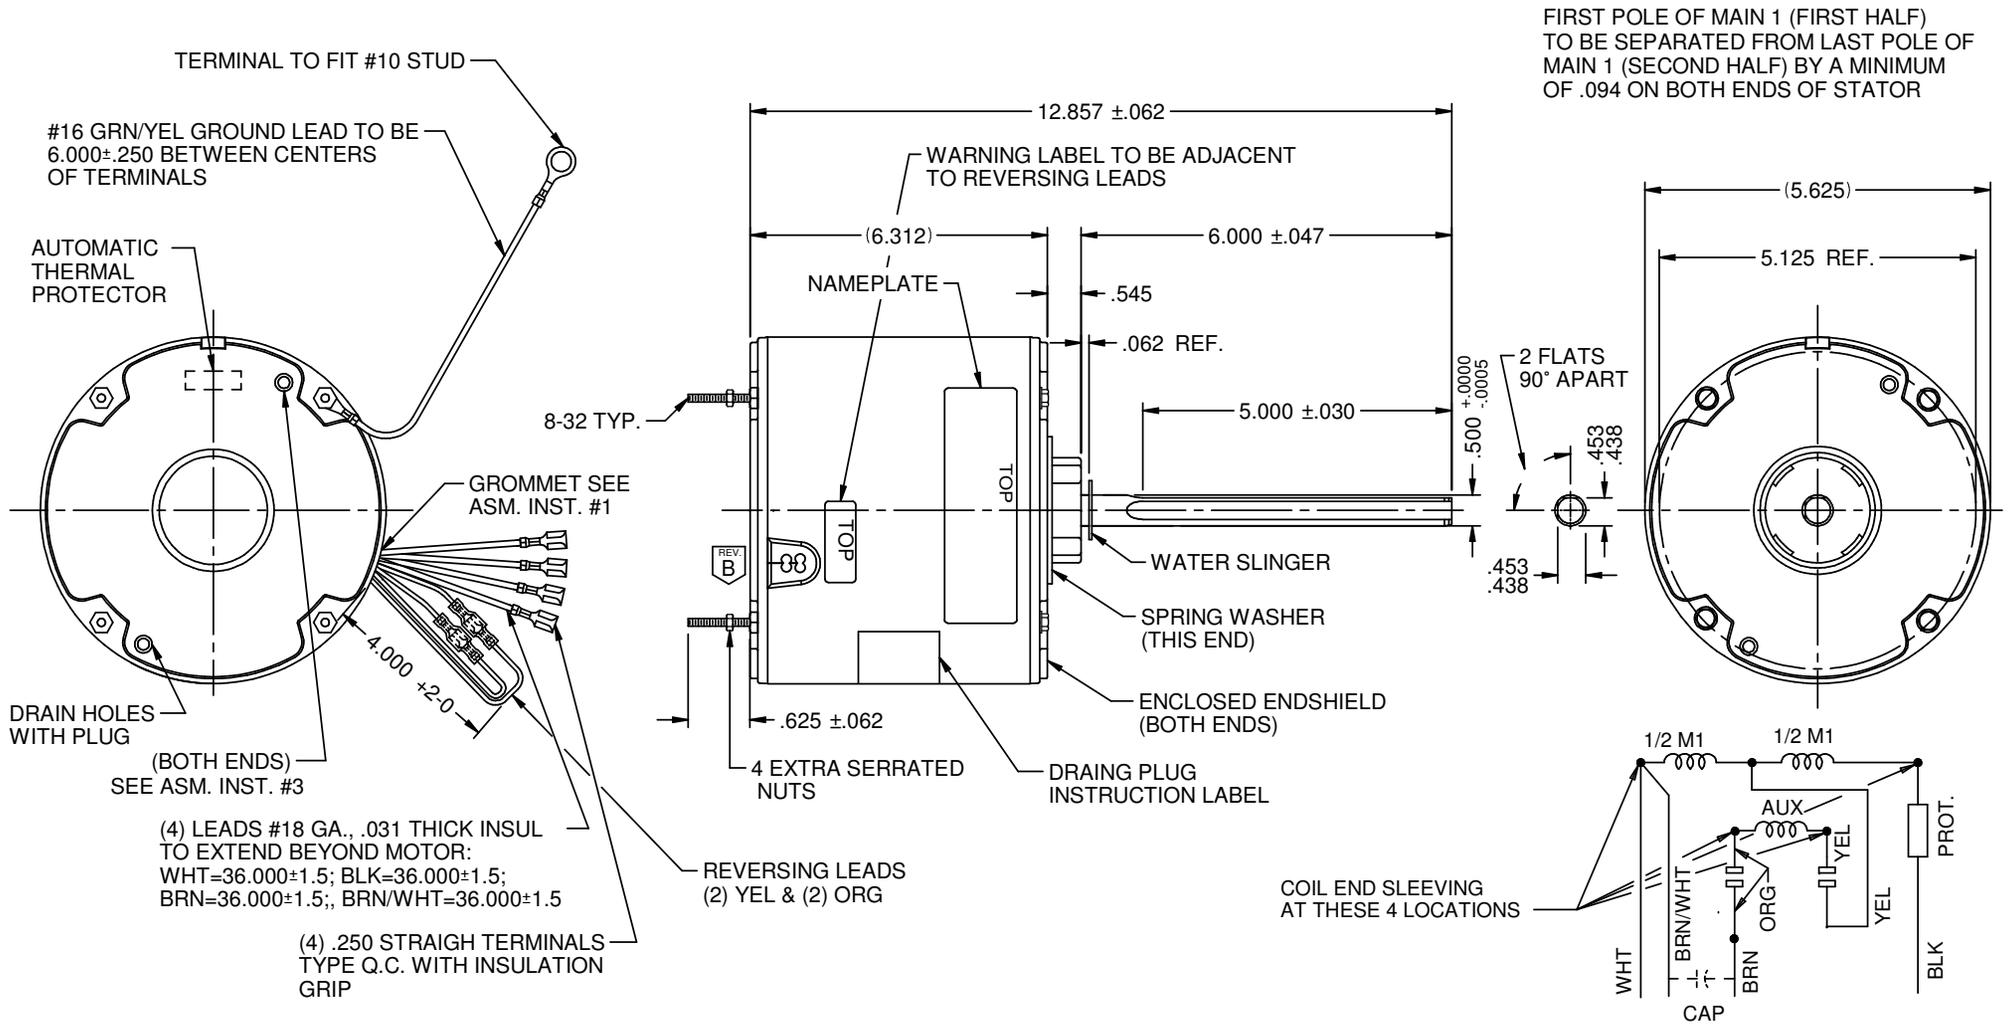

FIRST POLE OF MAIN 1 (FIRST HALF) TO BE SEPARATED FROM LAST POLE OF MAIN 1 (SECOND HALF) BY A MINIMUM OF .094 ON BOTH ENDS OF STATOR

NIDEC MOTOR CORPORATION 29-Mar-19

REVISION RECORD FOR: E34133	
GROMMET VIEW UPDATED.	
ISSUED BY: E. REYES	ENGINEER APPROVED: V. VIDALES

DIMENSIONS ARE FOR REFERENCE ONLY

UNLESS TOLERANCE IS SPECIFIED

<b>NIDEC MOTOR CORPORATION</b>			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			REVISION DATE: 29-MAR-19
TITLE	CODE	ITEM NO.	REV
CUSTOMER DETAIL DRAWING	V02	823847	B
SHEET NUMBER		DWG SIZE	
1 OF 3		B	