

RESCUE® Select™ OEM Replacement ECM Blower Motor

APPLICATIONS:

Universal high efficient ECM motor designed as a drop-in replacement for OEM constant torque motors.




6651RS

Replaces X13®† and SeleTech® constant torque ECM motors

- Programmed Torque Values set to match OEM performance*
- Uses Equipment's existing connections, for ease of installation
- High Efficiency Design
- Smooth, Quiet Start-Up and speed changes
- Potted Electric Module for Superior Moisture Protection
- 6000V Surge Protection
- Quiet Operation
- Belly Band Mounted
- Reversible Rotation
- Ball Bearings

NEW

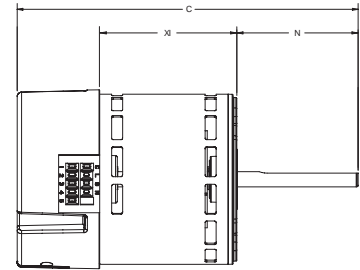

HP	RPM/Spds	Voltage	Catalog Number	List	Amps	Shaft N	Shell XI	Total C	Shaft Diameter	Ship Wt.	Notes
1	1050/Var	208-230	6651RS	\$606	6.4-6.6	4.5	5.5	12.8	0.500	18.0	-
3/4	1050/Var	208-230	6641RS	\$508	6.3-6.1	4.0	5.5	12.2	0.500	16.3	-
1/2-1/3	1050/Var	208-230	6631RS	\$437	4.6-4.3	3.5	5.5	11.8	0.500	18.8	-
1	1050/Var	115	6650RS	\$606	10.6	4.5	5.5	12.8	0.500	18.0	-
3/4	1050/Var	115	6640RS	\$508	9.3	4.0	5.5	12.2	0.500	15.0	-
1/2-1/3	1050/Var	115	6630RS	\$437	6.4	3.5	5.5	11.8	0.500	12.0	-

Note: Above motors must be programmed before sale to contractor. If interested in participating in this program, please contact us at 855-487-6686.

* Kit 33 required to program motors

† All marks shown within this document are properties of their respective owners.

